
PLANNING GUIDE · GRANITE WALL VENEER

Planning a reclaimed granite wall

Real New York cobblestone, sliced into wall tile. Plan it right before you order.

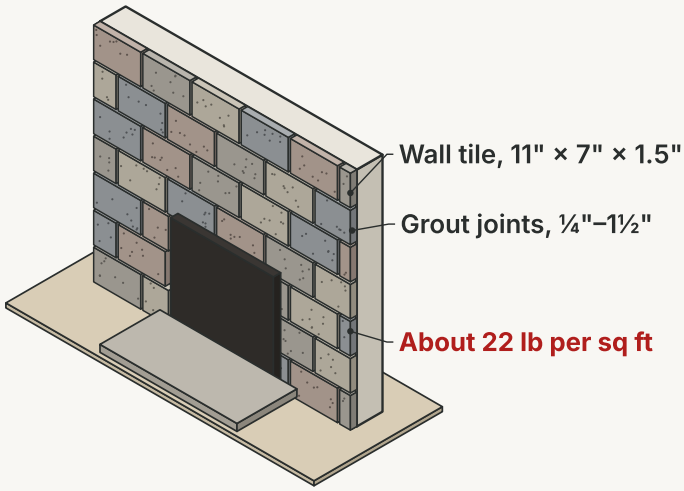


Plan the support first

At about **22 lb per sq ft**, this real granite is heavier than building codes allow for tile stuck straight onto a wall.

Indoors or out, it needs an **engineered design or mechanical support**. Your mason or engineer decides how.


Wall tile: 11" × 7" × 1.5", cut twice from a reclaimed New York Jumbo cobblestone. For feature walls and fireplaces.

1 Measure the wall




Width × height. Take off doors, windows and openings.

2 Plan the support




Have your engineer or mason choose the fixing before you order.

3 Pick the joint




From a tight ¼" to a bold 1½". Wider joints use fewer tiles.

4 Lay it out first



Spread tiles on the ground. Blend colors before they go up.


5 Grout and clean




Fill the joints, then clean the faces with a stiff brush and water.

Choose your joint


Tiles per sq ft



¼" joint
1.77 per sq ft · tight, modern



½" joint
1.67 per sq ft · our default



1½" joint
1.36 per sq ft · old-world

Why real granite?

- ✓ **Color runs all the way through**
  Molded stone is colored on the surface and can fade or chip to gray.
- ✓ **Every piece is one of a kind**
  Original split faces and street patina.
- ✓ **Reclaimed, not quarried**
  Saved from New York streets, kept out of landfill.

Three ways to buy

Reclaimed granite wall tile, 11" × 7" × 1.5" · pallet coverage by joint size

A sample

One tile by priority mail in 1–3 days. Hold it up to your wall.

By the tile

Any number, from just one. Good for small accents.

By the pallet

	½" joints	1" joints
Tiles	240	240
Covers	**144 ft²**	**160 ft²**

Count your tiles
Scan for the stone veneer calculator

Chief Bricks · 15 Fisher Ave, Nanuet, NY 10954 · (718) 379-1232 · chiefbricks.com