
INSTALL GUIDE · THIN BRICK FLOOR

Laying a reclaimed thin brick floor

New York brick underfoot, without raising the floor by a full brick.

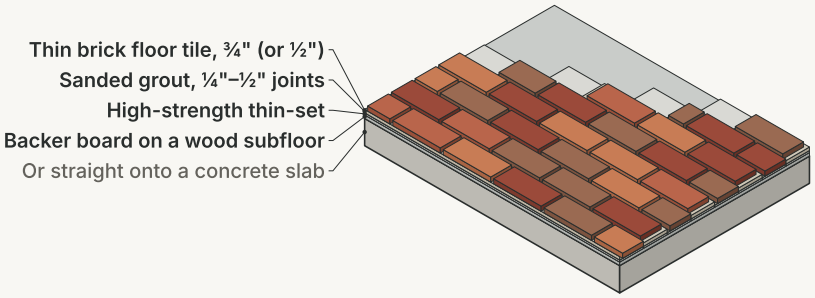


Which thickness?

¾" floor tile · in stock
Our standard. Cut from flat, no-frog New York brick.

½" floor tile · cut to order
Where every fraction of floor height counts.


Room for more height?
Full-depth flat floor bricks give the same look for less.

1 Ready the subfloor




Clean, level and strong. On wood, add cement backer board.

2 Dry layout




Lay tiles out first to blend colors and plan the pattern.

3 Spread thin-set




High-strength, notched trowel. Polymer-modified in wet rooms.

4 Set the tiles




Press each tile in. Spacers keep ¼"–½" joints even.

5 Grout



Sanded grout suited to brick, piped in with a grout bag.


6 Seal




Once the grout cures: penetrating sealer, or enhancing for richer color.

Pick a pattern


Extra: 10%, or 12–15% for herringbone



Running bond
Makes a room feel longer



Herringbone
Movement, more cuts



Basketweave
Old-world, woven look

Keep it looking good

- ✓ **Sweep or vacuum often**
  Grit wears the surface.
- ✓ **Warm water, pH-neutral cleaner**
  Mop as needed.
- × **No vinegar or acids**
  They eat the sealer and the brick.
- ✓ **Reseal every 2–4 years**
  Sooner in busy rooms.

Three ways to buy

Reclaimed thin brick floor tile · pallet coverage with ½" joints

A sample

Order one tile or a few. The sample box price updates in your cart.

By the tile

Any number, from just one. Good for small entries and hearths.

By the pallet

	¾" or ½" floor tile
Tiles	1,500
Covers	354 ft²

Count your tiles
Scan for the thin brick calculator

Chief Bricks · 15 Fisher Ave, Nanuet, NY 10954 · (718) 379-1232 · chiefbricks.com